SIEMENS

Product data sheet

3RT1015-1AK62



CONTACTOR, AC-3 3 KW/400 V, 1 NC, AC 110V 50HZ/ 120V 60HZ 3-POLE, SIZE S00, SCREW CONNECTION

General details:		
product brand name		SIRIUS
product designation	_	power contactor
Size of the contactor		S00
Protection class IP / on the front		IP20
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 +60
Active power loss / per conductor / typical	W	0.42
Item designation		
according to DIN EN 61346-2		Q
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		κ
Mechanical operating cycles as operating time	_	
• of the contactor / typical		30,000,000
 of the contactor with added auxiliary switch block / typical 		10,000,000
 of the contactor with added electronics-compatible auxiliary switch block / typical 		5,000,000
Main circuit:		
Number of poles / for main current circuit		3

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value	А	18
Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value	А	16
Operating current		
• at AC-3 / at 400 V / rated value	А	7
with 1 current path		
• at DC-1		
• at 24 V / rated value	А	15
• at 110 V / rated value	А	1.5
• at DC-3 / at DC-5		
• at 24 V / rated value	А	15
• at 110 V / rated value	А	0.1
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	А	15
• at 110 V / rated value	А	8.4
• at DC-3 / at DC-5		
• at 24 V / rated value	А	15
• at 110 V / rated value	А	0.25
with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	А	15
• at 110 V / rated value	А	15
• at DC-3 / at DC-5		
• at 24 V / rated value	А	15
• at 110 V / rated value	А	15
Service power		
• at AC-1 / at 400 V / rated value	kW	11
• at AC-2 / at 400 V / rated value	kW	3
• at AC-3		
• at 400 V / rated value	kW	3
• at 500 V / rated value	kW	3.5
• at 690 V / rated value	kW	4

Control circuit:	
Design of activation	conventional
Type of voltage / of the controlled supply voltage	AC
Control supply voltage frequency	

• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1		
• at 50 Hz / for AC		
rated value	V	110
• at 60 Hz / for AC		
rated value	V	120

Auxiliary circuit:


Auxiliary circuit.		
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts		
 instantaneous switching 		1
lagging switching		0
Number of NO contacts / for auxiliary contacts		
 instantaneous switching 		0
leading switching		0
Operating current / of the auxiliary contacts		
• at AC-12 / maximum	А	10
• at AC-15		
• at 230 V	А	6
• at 400 V	А	3
• at DC-12		
• at 60 V	А	6
• at 110 V	А	3
• at 220 V	А	1
• at DC-13		
• at 24 V	А	10
• at 60 V	А	2
• at 110 V	А	1
• at 220 V	А	0.3


Short-circuit:	
Design of the fuse link	
• for short-circuit protection of the auxiliary switch / required	fuse gL/gG: 10 A
 for short-circuit protection of the main circuit 	
 with type of assignment 1 / required 	fuse gL/gG: 35 A
at type of coordination 2 / required	fuse gL/gG: 20 A
In stallation for a uniting (dimension of	
Installation/mounting/dimensions:	
Type of mounting	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

series installation				Yes		
Width			mm	45		
Height			mm	57.5		
Depth			mm	72		
Distance, to be main	ntained, to earthed p	oart / sidewards	mm	6		
Connection type:						
Design of the electr	ical connection					
• for main current	circuit			screw-typ	pe terminals	
• for auxiliary and	control current circuit			screw-type terminals		
Identification numb	er and letter for swit	ching elements		01 E		
Certificates/appro	ovals:					
General Product A	pproval				Functional Safety / Safety of Machinery	Test Certificates
(SA)	<u>KETI</u>	ROSTEST			SUVA	Manufacturer
Shipping Approva	1					
ABS	BUREAU VERITAS		G L C			
Shipping Approva	I	other				
	RMRS	Manufacturer	<u>other</u>			
Further information	on:					
	ownloadcenter (Cata com/industrial-controls					
Industry Mall (Onlin http://www.siemens.c	e ordering system) com/industrial-controls	i/mall				
CAx-Online-Genera http://www.siemens.c						

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RT1015-1AK62/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1015-1AK62

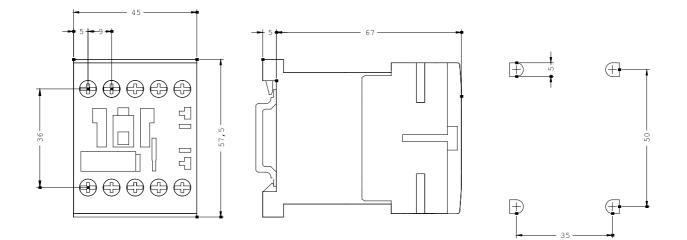

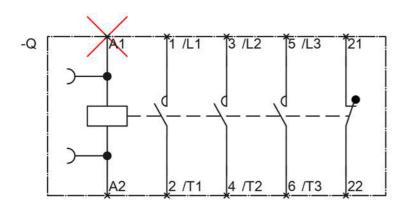

last change:

Feb 10, 2012